

Advanced AI Network Video Recorder POE

GNVR-A1616P 16 POE (16 ch.) Varenr.: 34200



Features

- ✓ 16 - channel input Plug / Play PoE network interfaces
- ✓ Support 2 pcs. SATA HDD
- ✓ Support Ultra H.265 / H.265 / H.264 video formats
- ✓ Supports ONVIF conformance (**Profile S, Profile G, Profile T**) and **RTSP** protocols.
- ✓ Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
- ✓ Support HDMI and VGA independent monitor outputs.
- ✓ Up to 16 Megapixels resolution recording
- ✓ ANR technology to enhance the storage reliability when the network is disconnected.
- ✓ Support cloud upgrade (FW & features)


Specifications

Decoding	Description
Decoding Format	Ultra 265, H.265, H.264
Decoding Capability	GNVR-A1616P: Smart Off: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30 Smart On: 2 x 12MP@30, 2 x 4K@30, 6 x 4MP@30, 8 x 3MP@30, 12 x 1080P@30, 16 x 720P@30
Audio Compression	G.711A,G.711U
Network	Description
Incoming Bandwidth	Smart Off: 320Mbps Smart On: 160Mbps
Outgoing Bandwidth	160Mbps
Remote Users	128
Protocols	TCP/IP;P2P;NTP;DHCP;PPPoE;HTTP;HTTPS;DNS;DDNS;SNMP;SMTP;NFS;RTSP;IPV


	6
Browser(Plugin)	Windows: IE(IE10/11), Firefox (version 52.0 and above), Chrome (version 45 and above), Edge (version 79 and above)
Video/Audio Input	Description
IP Video Input	GNVR-A1616P 16-ch
RCA Audio Input	1-ch
Video/Audio Output	Description
HDMI Output	HDMI:4K(3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
VGA Output	VGA:1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
RCA Audio Output	1-ch
Liveview Display	GNVR-A1616P :1/4/6/8/9/16
Corridor Mode Screen	GNVR-A1616P :3/4/5/7/9/10/12/16
Two-way Audio	Description
Two-way Audio	1-ch, RCA (Using the audio input and output)
Snapshot	Description
FTP/Schedule/Event Snapshot	4-ch snapshot, up to 4K resolution
Recording	Description
Recording Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/960P/720P/D1/2CIF/CIF
Synchronous Playback in Local	GNVR-A1616P :16-ch on monitor
Smart	Description
VCA Detection by IPC	Face Detection;face detection;Vehicle Detection;SIP(Intrusion Detection,Cross Line Detection,Enter Area,Leave Area);Ultra Motion Detection(UMD);Temperature Detection(Fire Detection,Smoking Detection,Temperature Measurement,Smoke and Fire Detection);People Counting(People Flow Counting,Crowd Density Monitoring);Video Metadata;Traffic Monitoring
Smart by NVR	Face detection;Smart Intrusion Prevention (SIP);Ultra Motion Detection(UMD)
VCA Search	Motor Vehicle Search;Non-Motor Vehicle Search;Human Body Search;General Search;People Counting Report;Heat Map
Smart by IPC	All channels (up to 8 images/s in total)Face Detection,face detection,Vehicle Detection,Temperature Detection,SIP,UMD,Video Metadata,Traffic Monitoring
Face Picture Library	Up to 16 face picture libraries,with up to 50,000 face pictures in total
Search by Image	Support
Vehicle Picture Library	Up to 5 vehicle picture libraries,with up to 25,000 vehicle pictures in total
SIP by NVR	4-ch
UMD by NVR	8-ch
Capacity of Snapshot Records	2 millions records for face snapshot;2 millions records for vehicle snapshot;3 millions records for SIP;2 millions records for video Metadata
Alarm	Description
General Alarm	Defocus Detection;Scene Change Detection;Object Left Behind;Object Removed;Auto Tracking;Motion Detection;Tampering;Human Body Detection;Video Loss;Alarm Input;Audio Detection
Alert Alarm	IP Conflict;Network Disconnected;Disk Offline;Disk Abnormal;Illegal Access;Hard Disk Space Low;Hard Disk Full;Recording/Snapshot Abnormal;Array Damaged;Array Degraded

GUI Language	Description	
GUI Language	English, Danish, Swedish, Norwegian, Finnish,	
Hard Disk	Description	
SATA	2 pcs. HDD SATA Interfaces	
Capacity	Up to 16TB for each HDD (The maximum HDD capacity varies with environment temperature) MAX 32 TB	
Disk Group	Support	
Redundant Storage	Support	
Disk Array Type	RAID 1	
External Interface	Description	
Network Interface	1 pcs. RJ45 10M/100M/1000M self-adaptive Ethernet Interface	
USB	Front panel: 1 x USB2.0; Rear panel: 1 x USB2.0, 1 x USB3.0	
RS485	1	
RS232	N/A	
Alarm In	8-ch	
Alarm Out	2-ch relay	
Power Supply	DC 12V/3A	
Power Switch	Support	
PoE	External Interface	
Interface	GNVR-A1616P :16 pcs. RJ45 10M/100M self-adaptive Ethernet Interface	
Max Power	GNVR-A1616P : Max 30W for single port, Max 240W in total (16 x 15 Watt)	
Supported Standard	IEEE 802.3at, IEEE 802.3af	
Working Environment	Description	
Working Temperature	-10° C ~ + 50° C (+14° F ~ +122° F)	
Working Humidity	≤ 90% RH (non-condensing)	
Power Consumption (without HDD)	≤ 12W	
Dimensions	Description	
Weight (without HDD)	≤ 2Kg (4.4lb)	
Height	1 Unit	
Dimensions	380mm × 315mm × 53mm (15.0"×12.4"×2.1")	
Certification	Description	
Certification	CE, FCC, UL, RoHS, WEEE	
CE	EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035	
FCC	Part15 Subpart B	

Dimensions

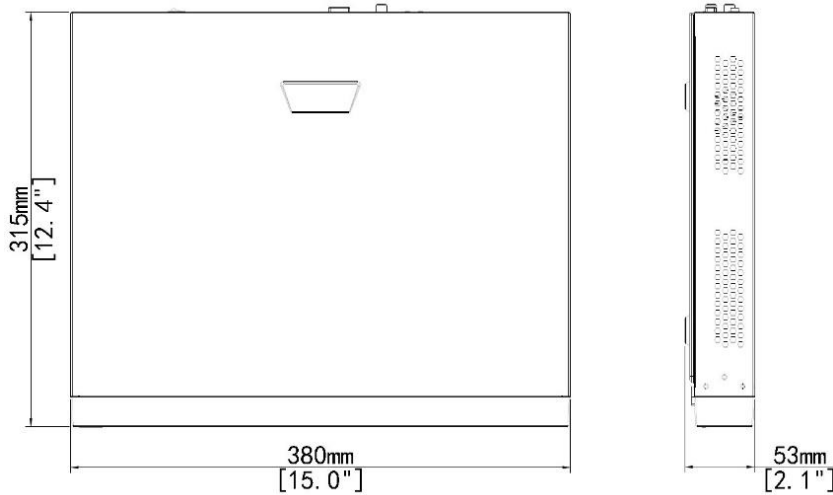

Rear Panel

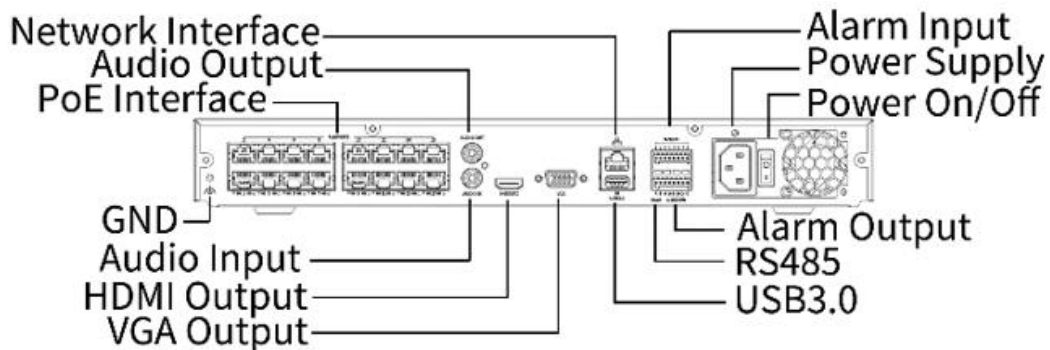

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Guardeon cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.

